

PATENT APPLICATION TRANSMITTAL

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Applications
Washington, D.C. 20231

Transmitted herewith for filing is the Utility Patent Application
of: Method Of And System For Diagnosing Optical System

Failures

Inventor(s) Chris Boyd
Hassen Pruitt

Enclosed are:

Utility Patent: 24 pgs of specification (w/cover & abstract)

8 sheet(s) of 10 figures of informal drawings

Assignment of the invention to MCI Communications Corporation

PTO Form-1595

Declaration/Oath and Power of Attorney

Transmittal Letter

Certificate of Mailing/EM549006651US/Postcards

Title: Method And Apparatus Using Enhanced Attachment For Improved Connectivity In Telecommunications

The Filing Fee has been calculated below:	Number Filed	Number Extra	Rate	Fee
Basic Fee			\$790.00	\$790.00
Total Claims	20 - 20 =	0	x \$22.00	\$0.00
Independent Claims	2 - 3 =	0	x \$82.00	\$0.00
Multiple Dependent Claim Present			\$270.00	
Assignment Recordation Fee			\$ 40.00	\$40.00
			Total Filing Fee	\$830.00

The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to our Deposit Account No. 13-2491. Any extension or petition fees under 37 CFR 1.17., any filing fees under 37 CFR 1.16 for presentation of extra claims, any Additional filing fees required under 37 CFR 1.16., any patent application processing fees under 37 CFR 1.16., any fees associated with the recordation of the Assignment. A duplicate copy of this page is enclosed for the Finance Branch.

I hereby certify that this correspondence is being deposited with the United States Postal Service as "Express Mail" in an envelope addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington D.C. 20231
Dated: July 31, 1998
Express Mail Label No. EM549006651US

By

Carolyn Miller

Deborah Miller 7/31/98
Deborah Miller
Attorney for applicant(s)
Reg. No. 37,679

Send all correspondence to:
Technology Department
MCI COMMUNICATIONS CORPORATION
1133 19TH STREET, NW
WASHINGTON DC20036

07/31/98
JCS04 U.S. PTO

JCS04 U.S. PTO
09/12/98
07/31/98

09/12/98 09/12/98

**METHOD AND APPARATUS USING ENHANCED
ATTACHMENT FOR IMPROVED
CONNECTIVITY IN TELECOMMUNICATIONS**

Christopher L. Boyd

Hassen Pruitt

**METHOD AND APPARATUS USING ENHANCED ATTACHMENT
FOR IMPROVED CONNECTIVITY IN TELECOMMUNICATIONS**

DESCRIPTION

Technical Field

5 The invention relates to telecommunications and more particularly to improvements in digital provisioning for voice services.

Background of Invention

10 For the majority of the history of telecommunications, voice has been the predominant application. Indeed, only recently has data transmission become significant. Nevertheless, the advances that have been made in data communications have been so profound that it is not unusual for modern data communications technology to be applied to carrying voice, in addition to data.

15 Many of the improvements in data communications relate to packet switching. Different varieties of data communication technology falling under the class of packet switching include Frame Relay (hereinafter also FR),
20 Asynchronous Transfer Mode (ATM), Internet Protocol (IP), voice over Internet Protocol, SMDS, cell relay networks or the like.

25 Packet switching networks provide a payload transport capability which is applied to voice communication purposes. However, packet switching networks lack other services which are typically found in the voice dedicated network. For

example, the routing or addressing facilities typically found in a voice network are not present in a packet switching network and accordingly, in order to provide packet switched transport capability for voice, some accommodation must be made for routing calls.

More particularly, when a voice switch such as a Private Branch Exchange (PBX) is adapted for service over the Integrated Services Digital Network (ISDN) addressing information is carried in the so called D channel. When adapting a PBX to connect to a Frame Relay (FR) network, the D channel, sourced at the PBX, terminates at an attachment device or more particularly, a Frame Relay Attachment Device (FRAD).

In this configuration, the FRAD is designed to provide a routing service to the PBX. The FRAD is capable of directing the call setup message to a particular Permanent Virtual Circuit (PVC) in the FR network so as to access the called terminal. In order to provide this service, however, the FRAD needs a correlation between terminal address (in voice applications this is the same as a telephone number or extension) and FR network channel. One of the difficulties with carrying voice services over packet switched networks is the problem of providing the FRAD or the like with this information. Complicating the problem is the dynamic nature of the information, requiring it to be constantly updated and/or revised so that it is accurate.

Summary of Invention

The invention solves the foregoing problem and provides technical advantages as described below. In particular,

with respect to one aspect, the invention provides a method of enhancing the provision of voice services via packet switched facilities in which a voice switch is connected to the packet switched facilities using an associated attachment device, the method including:

storing, in plural attachment devices, information respecting voice terminals accessible through the associated voice switch;

generating a request from a particular attachment device to another attachment device for information respecting voice terminals accessible via the another attachment device's associated voice switch; and

storing at the particular attachment device information received in response to the request.

With respect to another aspect, the invention relates to a system for providing enhanced voice services via packet switched facilities including a voice switch connecting to the packet switched facilities with an associated attachment device, the system including:

means in plural attachment devices for storing information respecting voice terminals accessible through the associated voice switch;

means in plural attachment devices for generating a request to another attachment device for information respecting voice terminals accessible via the another attachment device's associated voice switch; and

second storing means in plural attachment devices for storing information received in response to the request.

Brief Description of the Drawings

5 The present invention will now be described in further detail in the following portions of this specification when taken in conjunction with the attached drawings in which like reference characters identify identical apparatus and in which:

10 Fig. 1 is a block diagram illustrating a system operating in accordance with the present invention;

Figs. 2A through 2C are flow charts which represent the operation of typical attachment devices of Fig. 1;

15 Fig. 3 illustrates information which may be found in the memory of an attachment device in accordance with the present invention;

Fig. 4 illustrates a correlation of several PVCs and attachment devices;

20 Figs. 5A and 5B relate to an embodiment of the invention in an application in which Switched Virtual Channels are used and, in particular, Fig. 5A shows a portion of an initialization routine for a typical FRAD and Fig. 5B shows the relationship between exemplary FRADs 310, 311 and 312 and the FR 300;

25 Fig. 6 illustrates an application of the invention which allows cooperation among attachment devices in

multiple frame relay networks so long as they have gateway access to each other; and

Fig. 7 illustrates portions of the data in the "own" terminal listing of particular FRAD entities of Fig. 6.

5 **Best and Various Modes for Carrying Out Invention**

10 Fig. 1 shows a frame relay network 100. Included in the frame relay network 100 and not specifically illustrated in Fig. 1 are a plurality of data sources and sinks (here the term data is used to distinguish the form of the information from voice). Fig. 1 also shows several PBXs 201-203 which employ the services of the frame relay network to transmit voice. Coupled between each voice switch PBX 201-203 and the frame relay network 100 is an associated attachment device, particularly a Frame Relay Attachment Device (FRAD) such as FRADs 301-303.

15 Fig. 1 also shows the connection of each PBX to the local Public Switched Telephone Network or PSTN (local PSTN refers to the portion of the PSTN which is accessible to the associated PBX without incurring toll charges).

20 Particularly, each PBX (including each of the illustrated PBX's 201-203) is capable of dialing into the local PSTN network and reaching thousands of telephone terminals. Because of typical calling tariffs, there is no per call charge for accessing any of this large number of terminals.

25 More particularly PBX 201 may access any terminal connected in the local PSTN 401. Likewise, PBX 203 can access any terminal connected in the local PSTN 403. In addition, of course, many telephone terminals, such as terminal T1 or T5 can access many other terminals, such as terminals T2. If

5 this access traverses a toll network 500, that access will
carry a toll charge. However, if such an access can be made
through the Frame Relay network 100 then the toll charge can
be avoided. Fig. 1 shows specific terminals connected in
different local PSTNs; terminal T5 is connected in local
PSTN 401 and terminal T2 is connected in local PSTN 403.
Terminal T1 is also connected in local PSTN 401 via PBX 201.

10 Typically, a PBX may be configured to use ISDN. As
such, when a call is placed by a terminal, such as the
terminal T1, the PBX 201 formulates a call setup message in
the D channel. The call setup message is received by the
associated attachment device 301. The associated attachment
device 301 reads the dialed number, i.e. the identification
of the called terminal, such as the terminal T2, and
15 forwards a call setup message across the FR 100 to the FRAD
303 which is associated with the PBX 203.

20 In order to be able to perform these functions, the
FRAD 301 must "know" that the called terminal T2 is attached
to the PBX 203 which is associated with the FRAD 303. More
succinctly, the FRAD 301 must "know" that the call is
intended for the voice switch associated with the FRAD 303.

25 One way to provide the FRAD 301 with this information
is to manually insert the information into FRAD 301. This
requires the manual loading of data in each of a plurality
of attachment devices, which data identifies the terminals
associated with each of the other attachment devices. Even
if this were not a daunting task, changes in this data would
quickly render the effort of little or no value.

To ease the burden and enhance the provision of voice services over the packet switched facility the attachment devices are modified to cooperate in sharing information respecting terminal accessibility. More particularly, and referring to Fig. 1, FRAD 301 is supplied with information identifying the telephone terminals which are accessible to the associated PBX, e.g. PBX 201. Accessible, in this context, means accessible without toll charges and without relying on FR 100. In other words, FRAD 301 is supplied with and stores information identifying the telephone terminals associated with the local PSTN 401. Each of these terminals is a terminal which is accessible to the PBX 201 without incurring toll charges. Each other attachment device, such as FRAD 302, FRAD 303, etc., is also supplied with this information, i.e. information identifying telephone terminals accessible through the associated PBX without incurring toll charges. In this fashion, FRAD 302 obtains information identifying telephone terminals accessible to PBX 202, and FRAD 303 obtains information respecting telephone terminals accessible via PBX 203, etc. The manner in which this class of information is supplied to the attachment devices may be manual or via any other suitable procedure.

Thereafter, the attachment devices exchange information with one another. In this way, for example, FRAD 301 obtains the information that identifies the telephone terminals accessible via the PBX associated with the attachment device 302 and the telephone terminals accessible via the PBX associated with attachment device 303, etc.

With this information, when the call setup message is received by the attachment device 301, for example, it can

determine, by reviewing this information, if the called terminal is among the list of terminals accessible to any PBX coupled to the attachment devices of frame relay network 100. Upon learning that the called terminal is accessible to an identified one of the PBXs coupled to the frame relay network 100, the call setup message is directed to the attachment device associated with that PBX, as is described in more detail below.

More particularly, frame relay networks include Permanent Virtual Circuits (PVC) and may also include Switched Virtual Circuits (SVC). The simpler frame relay networks, including most frame relay networks implemented today, are supplied with PVC to the exclusion of SVC. In terms of Fig. 1, then, PBX 202/FRAD 302 is accessed from FRAD 301 via a particular PVC, in other words one PVC, available at FRAD 301, is dedicated to reaching FRAD 302. A different PVC, available at FRAD 301, is used by FRAD 301 to access FRAD 303.

Fig. 4 represents the function of six PVCs in frame relay network 100. In particular, PVC A is available at attachment device 301 and it accesses attachment device 302. PVC B is also available at attachment device 301 and it accesses device 303, etc.

Fig. 3 illustrates a portion of the memory of a typical attachment device such as FRAD 301. The memory illustrated in Fig. 3 is dedicated to storing information respecting terminals which are accessible either directly or via FR100. The information is divided into two portions, a first portion is shown at the left, headed "OWN". This information identifies the telephone terminals accessible to

the particular attachment device via the associated PBX. If, for example, the PBX 201 were located in Washington, D.C., this complement of terminals would be identified (in conventional NPA or NPA-NXX fashion) as shown in Fig. 3. In particular, the PBX in Washington, D.C. is capable of accessing any telephone terminal with a 202 NPA. In addition, there is a range of telephone terminals with a 703 prefix which are accessible to the PBX in Washington, D.C. This is identified in Fig. 3 as 703-XXX through 703-YYY. Likewise, there is a range of telephone terminals with a 301 NPA which are accessible to the PBX in Washington, D.C. These are identified in Fig. 3 as 301-XXX through 301-ZZZ. The list just described identifies each telephone terminal accessible to the PBX 201 on the assumption that that PBX was located somewhere in Washington, D.C.

Prior to interaction between a particular attachment device such as the FRAD 301 and any other attachment device, the information just described is the only information available to that particular attachment device respecting telephone terminals accessible to the associated PBX.

After the attachment device 301 is placed into service and allowed to interact with other attachment devices as will be described, its memory will contain additional information, i.e. that information in Fig. 3, shown at the right. This information is divided into two exemplary portions, each identified by a different PVC identification. For example, Fig. 3 shows a first PVC, i.e. PVC A, and a second PVC, i.e. PVC C. Each portion of Fig. 3 also associates a list of accessible telephone terminals. Under the heading PVC A, Fig. 3 shows two groups of telephone terminals, one including a particular NPA, in this case

NPA1, as well as some but not all of telephone terminals with a different NPA, i.e. NPA2. In particular, telephone terminals in the range NPA2-XXX through NPA2-ZZZ are included. Fig. 3 also indicates that PVC C is associated with a different complement of telephone terminals, some telephone terminals including an NPA3 prefix, and particularly NPA3-XXX through NPA3-ZZZ as well as all telephone terminals with an NPA4 prefix.

The manner in which this information is acquired and the manner in which it is used will now be described.

Figs. 2A through 2C show respectively an initialization process implemented by a typical attachment device, a receive query process and a change in terminal data process, all executed by an attachment device at different times. The initialization process is executed on the attachment device joining a particular network. In order to explain the operation of this process, assume that the system shown in Fig. 1 has been in operation for some time. In particular, the frame relay network 100 has coupled to it attachment devices 302 and 303, each of which in turn is associated with its respective PBX, PBX 202 and PBX 203. In addition, each of the attachment devices 302 and 303 has information respecting terminals accessible through its associated PBX as well as information respecting terminals accessible through the other (the manner in which the latter function is accomplished will be described below). Furthermore, assume that FRAD 301 has just been initialized in the frame relay network 100. As part of that initialization process, steps 221 through 227 are performed.

Step 221 generates a query from the attachment device 301 to locate other attachment devices connected to the frame relay network 100. Two such attachment devices which will be located are attachment devices 302 and 303. Assume, for example, that at step 222, attachment device 302 is located. Thereafter, step 224 generates a query, directed at the attachment device 302, for terminal data. The query is directed at attachment device 302 by being directed to the particular PVC which allows attachment device 301 to access attachment device 302. The query for terminal data is a query for the data of attachment device 302 stored in its own terminal portion, i.e. the left hand portion of Fig. 3. As will be described below, when attachment device 302 receives this query, it returns the requested data such that at step 225, attachment device 301 records the received data along with the PVC ID. This data is recorded as a block in the right hand portion of the memory of attachment device 301. Thereafter, step 226 sends own terminal data from the attachment device 301 to the attachment device 302. Step 227 then determines whether additional PVCs should be queried to locate additional attachment devices. If the positive response is active, then step 223 selects another PVC and the process is repeated. In this fashion, attachment device 301 will attempt to locate an attachment device on each PVC available to it. Each time another attachment device is located, the attachment devices will exchange terminal data, i.e. each will send the other its own terminal data information.

Fig. 2B illustrates the operation at an attachment device when it receives a query for own terminal data. The first step, step 230, identifies the PVC on which the query has been received. This information allows the receiving

device to reply to the device which initiated the query. Step 231 sends own terminal data, as requested, and step 232 records the received data (that is, the data received from the querying attachment device) along with the PVC ID.

5 Finally, assuming that all attachment devices have exchanged own terminal data with all other attachment devices, and that no new attachment devices enter the network 100, there still is a requirement to cover changes in accessible terminal information because of outside
10 factors, e.g. new NPAs, etc. Accordingly, the process of Fig. 2C is implemented when a change in own terminal data is identified at a particular attachment device. In particular, once a change in own terminal data has been detected, the attachment device must exchange that
15 information with each other attachment device which is within the frame relay network 100. Function 240 is used to select a PVC associated with an attachment device, i.e. the PVC is identified in the first line on the blocks in the right hand portion of Fig. 3. Functions 241 through 243
20 generate a query for own terminal data of the another attachment device located at the selected PVC. Function 242 records the received data and the PVC ID and function 243 sends the now-changed own terminal data. Function 244 is used to determine when all pertinent PVCs have been run
25 through the process of functions 240 through 243.

The manner in which the information in the attachment device memory is used should be apparent from Fig. 3 but a brief description will suffice. In particular, assume that a call is generated at PBX 201 for a particular called
30 number which is included in NPA3. PBX 201 incorporates this call setup message into the D channel and transfers it to

attachment device 301. Attachment device 301 reviews the list of telephone terminals identified in memory (see the right hand portion of Fig. 3). In the first block (under the heading PVC A), the attachment device would not find the called terminal since this block includes only NPA1 and NPA2. However, when the attachment device 301 checks the next block, it will find that it includes NPA3 terminals and assuming that there is a match between the called number and the range of NPA3 numbers accessible, then the attachment device 301 will send the setup message for this particular call through PVC C to access the appropriate attachment device for call completion.

The foregoing description is based on a frame relay network which employs PVC and not SVC. Fig. 4 for example shows that the six PVCs illustrated are dedicated so that, for example, PVC A only accesses device 302 from device 301.

The invention is also applicable, however, to networks which include SVC. The invention operates with even more capability in the SVC environment than in the PVC environment.

In the PVC environment, for every attachment device pair which does not have a PVC therebetween, there are some terminals that cannot be reached; in other words, complete connectivity requires a full mesh. The SVC capability eliminates the necessity for fully meshed connectivity.

The SVC allows a given channel to be addressed, i.e. to access more than one destination as opposed to the PVC which is dedicated to a single destination. Thus, a typical FRAD can use a channel into the FR to connect to any other FRAD

which is also part of the FR, so long as the address of the other FRAD is known.

Refer to Fig. 5B. Fig. 5B illustrates a frame relay network 300 which includes, among other things, Switched Virtual Channel capability and includes FRAD 310-312. We will assume for this description that FRAD 310 has been denominated as the master or the controller. We will also assume that newly added FRAD 311 is in the process of being initialized, whereas FRAD 312 has been initialized at some time in the past. In the initialization process for FRAD 311, FRAD 311 will receive information identifying FRAD 310, and its address, as the network controller. Rather than having to query each possible address from FRAD 311, FRAD 311 then merely accesses FRAD 310, using the address already supplied. Thus, with SVC capability in the frame relay network, initialization steps formerly shown in Fig. 2A can be replaced by the steps shown in Fig. 5A. Function 230 generates the query to the master FRAD as already explained. That query requests the addresses for all other FRADs, function 231. The querying FRAD, 311 in this case, stores the addresses, function 231, and then initializes its address register, function 232. The initializing FRAD 311 will then perform functions 233-235 for each address it has received. These functions provide for the exchange of local terminal information between the new FRAD and the "old" FRAD. Functions 236 and 237 provide for changing the address register to reach other, yet unprocessed, FRADs, until all members of the network have been processed, at which time the process terminates.

At the time FRAD 311 receives address information on other attachment devices in the network from the master FRAD

310, the address data base of master FRAD 310 is altered by adding information respecting the new addition, FRAD 311. Accordingly when a further new attachment device joins the network it will receive addressing information on attachment device 311 along with the others previously in the network.

The foregoing embodiments, including frame relay networks with only PVC and frame relay networks with SVC, are limited to single domains, i.e. there is only a single frame relay network. The invention, however, is not limited to single domain applications as will now be described.

Fig. 6 shows two domains, one centered on frame relay network 600 and the other centered on frame relay network 700. Each domain can be enhanced with the features of the present invention. However, in this multiple domain application further advantages accrue. Application of the invention allows any terminal in local PSTN 801 to connect via frame relay network 600 to any terminal in local PSTN 802 or 803, as has already been explained. Likewise, employing the principles of the invention, any terminal in exemplary local PSTN 806 can connect to any terminal in local PSTN 805 or 802. However, since local PSTN 802 is common to the two domains, the FRADs 604 and 602 can act as "gateways" into its local domain for the remote domain, as will now be explained.

Fig. 7 shows the internal memories for FRAD 604 and FRAD 602, respectively and particularly that portion in which the own terminal information is identified. In this example, we have assumed that local PSTN 802 (which is local to FRAD 604 and FRAD 602) represents the Washington, D.C. area such that the own terminal identification for FRAD 602

and 604 is the same as that used for Fig. 3. Thus the own terminal for both FRAD 604 and 602 identify the following, as local terminals:

202
703-xxx-yyy
301-aaa-bbb

However, in its function as a gateway FRAD 604 also identifies, following a domain mark (to indicate that the terminals listed below are in a different domain), information including NPA information for local PSTN 801 and local PSTN 803. In other words, when FRAD 604's "own" terminal information is dispersed to FRAD 606 and 605 via FR 700, those entities will discover that they can reach local areas 801 and 803 via FRAD 604. Correspondingly, the own terminal list contained in FRAD 602 will include, in addition to the 202, 703 and 301 NPA information, and set off by a domain mark, the NPA information for local PSTN 806 and 805. Thus when FRAD 602 "own" terminal information is dispersed among the members of FR 600, those members (including FRAD 601 and 603) will learn that they can reach PSTN 806 and 805 via FRAD 602 as a "gateway".

In operation, the presence of the data below the domain mark in the memory of FRAD 602 will result in the distribution of that information to other members of FR 600. Distributing that information to FRAD 601 and 603 (other members of FR 600) will enable those devices to recognize that terminals in local PSTN 805 and 806 are accessible in the "other domain". Likewise, the presence of the data below the domain mark in the memory of FRAD 604 will result in the distribution of that information to other members of FR 700.

Distributing that information to FRAD 605 and 606 (other members of FR 700) will enable those devices to recognize that terminals in local PSTN 801 and 803 are accessible in the "other domain".

- 5 While several embodiments of the invention have been described in detail, those examples should not be considered limiting, rather the scope of the invention should be construed in accordance with the claims attached hereto.

CLAIMS

What is claimed is:

1 1. A method of enhancing the provision of voice
2 services via packet switched facilities in which a voice
3 switch is connected to the packet switched facilities using
4 an associated attachment device, the method including:
5 storing, in plural attachment devices, information
6 respecting voice terminals accessible through the associated
7 voice switch,
8 generating a request from a particular attachment
9 device to another attachment device for information
10 respecting voice terminals accessible via the another
11 attachment device's associated voice switch, and
12 storing at the particular attachment device information
13 received in response to the request from the particular
14 attachment device.

1 2. The method of claim 1 wherein the particular
2 attachment device, prior to generating a request to another
3 attachment device, generates a query to one or more virtual
4 circuits, accessible from the particular attachment device,
5 to determine if the channel accesses another attachment
6 device, and generates the request in an instance in which
7 another attachment device is identified.

1 3. The method of claim 1 or claim 2 wherein the
2 particular attachment device, transmits accessibility
3 information, respecting voice terminals accessible through
4 the voice switch associated with the particular attachment
5 device, to the another attachment device.

1 4. The method of claim 1 or claim 2 wherein the another
2 attachment device responds to the request by the particular
3 attachment device by transmitting the accessibility
4 information respecting voice terminals reachable via the
5 associated voice switch.

1 5. The method of claim 2 in which the particular
2 attachment device stores, along with the information
3 respecting voice terminals accessible through the another
4 attachment device's associated voice switch, information
5 identifying the particular circuit through which the another
6 attachment device is accessible.

1 6. The method of claim 2 wherein the act of generating
2 a query is executed on initialization of the particular
3 attachment device.

1 7. The method of claim 4 or 5 which further includes
2 exchanging identities of voice terminals accessible through
3 the associated voice switch with other attachment devices
4 when there is a change in the set of voice terminals
5 accessible through the associated voice switch.

1 8. The method of claim 1 or claim 2 in which the
2 attachment device is a frame relay attachment device and the
3 packet switched facility is a frame relay network.

1 9. The method of claim 1 or 2 in which the voice switch
2 is a PBX and is also coupled to the PSTN.

1 10. The method of claim 1 wherein the information
2 respecting voice terminals accessible through the associated
3 voice switch identifies terminals which are directly

4 accessible to the associated voice switch or terminals which
5 are accessible through the associated voice switch through a
6 packet switched network.

1 11. A system for providing enhanced voice services via
2 packet switched facilities including a voice switch
3 connecting to the packet switched facilities with an
4 associated attachment device, said system including:

5 means in plural attachment devices for storing
6 information respecting voice terminals accessible through
7 the associated voice switch,

8 means in a particular attachment device for generating
9 a request to another attachment device for information
10 respecting voice terminals accessible via the another
11 attachment device's associated voice switch, and

12 second storing means in the particular attachment
13 device for storing information received in response to the
14 request.

1 12. The system as recited in claim 11 which further
2 includes:

3 means in plural attachment devices for generating a
4 query to one or more virtual circuits, accessible from an
5 attachment device, to determine if the circuit accesses
6 another attachment device, and wherein

7 said means in a particular attachment device for
8 generating a request, generates the request in an instance
9 in which another attachment device is identified at a
10 particular circuit.

1 13. The system of claim 12 wherein the particular
2 attachment device further includes transmit means for
3 transmitting accessibility information, respecting voice

4 terminals accessible through the voice switch associated
5 with the particular attachment device, to another attachment
6 device after identifying the another attachment device.

1 14. The system of claim 13 wherein the attachment
2 device includes means to respond to the request by
3 transmitting the accessibility information respecting voice
4 terminals accessible via the associated voice switch.

1 15. The system of claim 13 in which the means for
2 storing stores, along with the information respecting voice
3 terminals accessible through the attachment device's
4 associated voice switch, information identifying the
5 particular circuit through which the another attachment
6 device is accessible.

1 16. The system of claim 12 or claim 13 wherein the
2 means for generating a query is operated in response to
3 initialization of the associated attachment device.

1 17. The system of claim 11 where plural attachment
2 devices further include means, responsive to a change in the
3 set of voice terminals accessible through the associated
4 voice switch, for initiating an exchange of identities of
5 voice terminals accessible through the associated voice
6 switch with other attachment devices.

1 18. The system of claim 11 in which the attachment
2 device is a frame relay attachment device and the packet
3 switched facility is a frame relay network.

1 19. The system of claim 11 which the voice switch is a
2 PBX and is also coupled to the PSTN.

1 20. The system of claim 11 wherein the information
2 respecting voice terminals accessible through the associated
3 voice switch identifies terminals which are directly
4 accessible to the associated voice switch or terminals which
5 are accessible through the associated voice switch through a
6 packet switched network.

METHOD AND APPARATUS USING ENHANCED ATTACHMENT
FOR IMPROVED CONNECTIVITY IN TELECOMMUNICATIONS

ABSTRACT OF DISCLOSURE

Voice services provided over a packet switched facility
such as a Frame Relay network are enhanced with routing
capability by providing for attachment devices which, on
initialization with the network, attempt to discover other
similar attachment devices on the network. Thereafter the
attachment devices exchange information on terminal
accessibility to improve connectivity over the network.

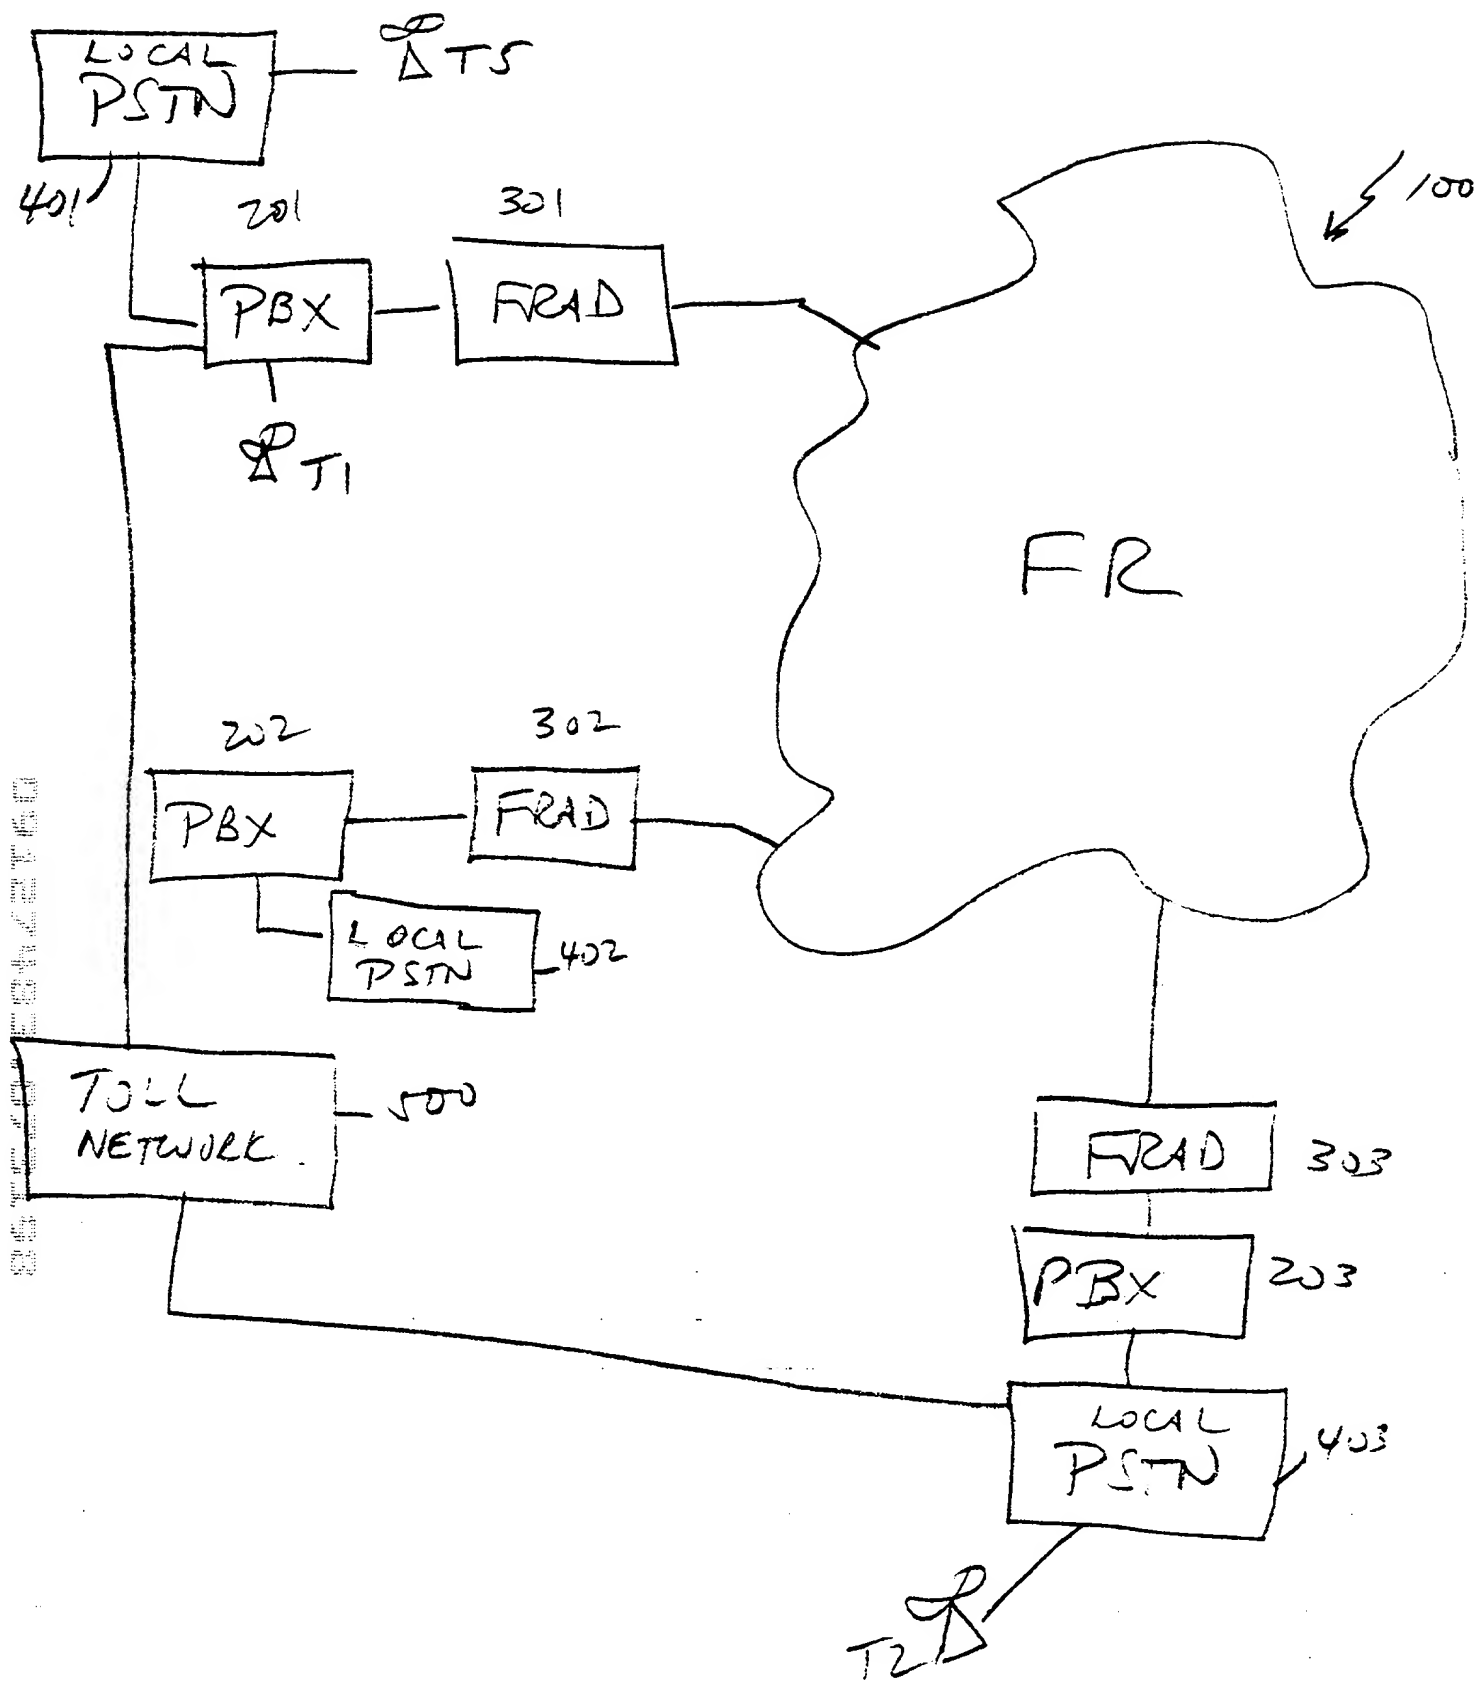


FIG 1

INITIALIZATION

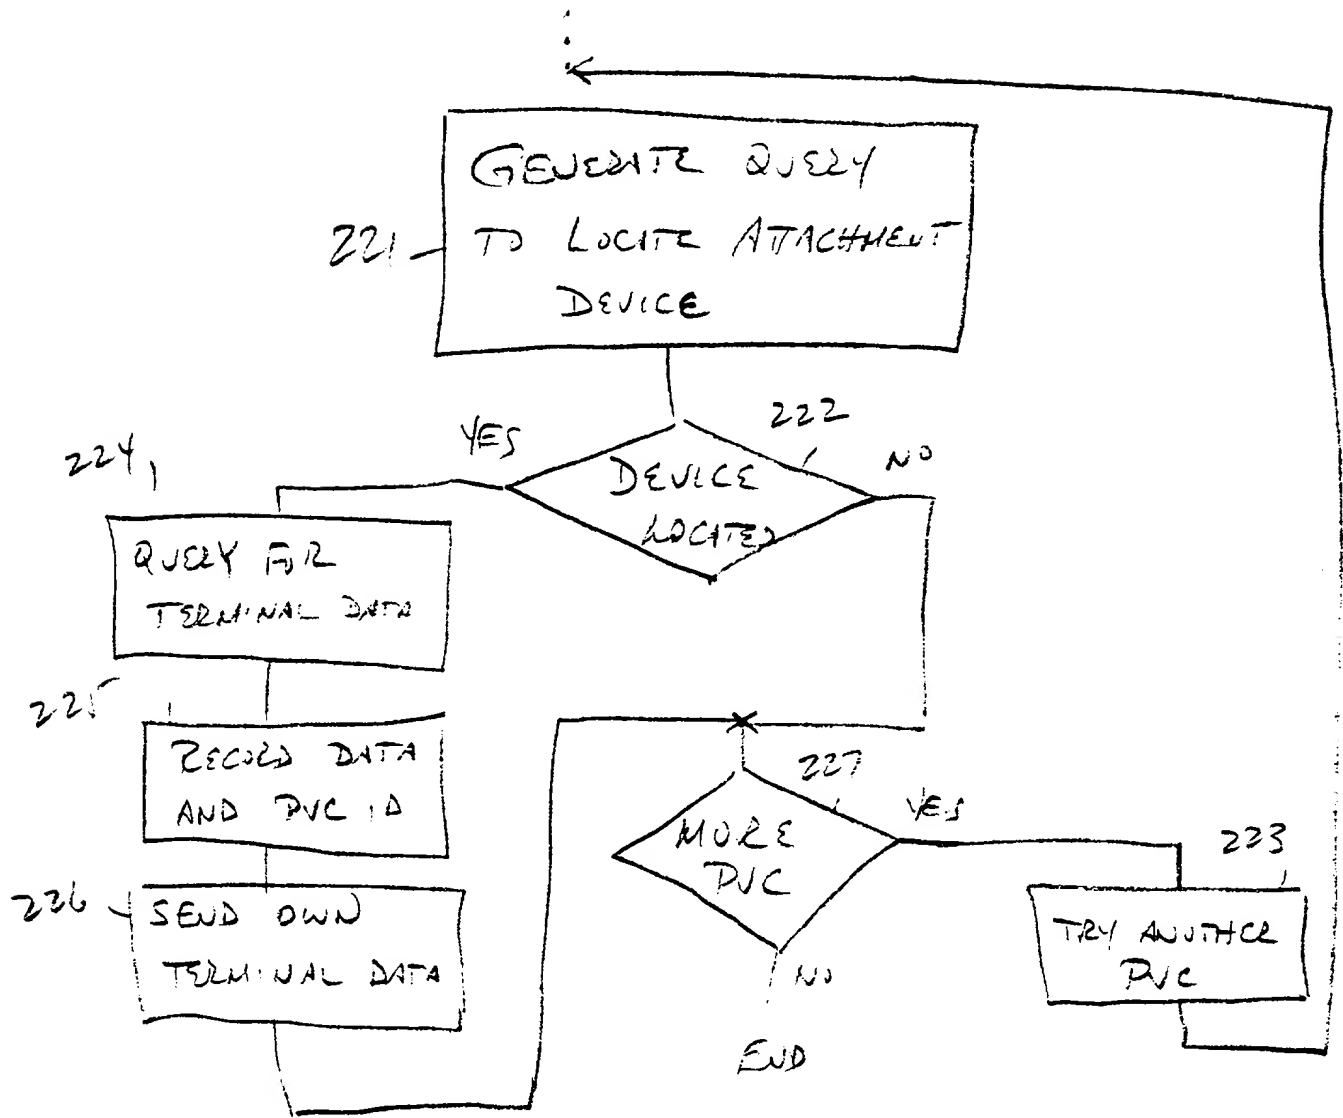


FIG 2A

PROCESS 2524

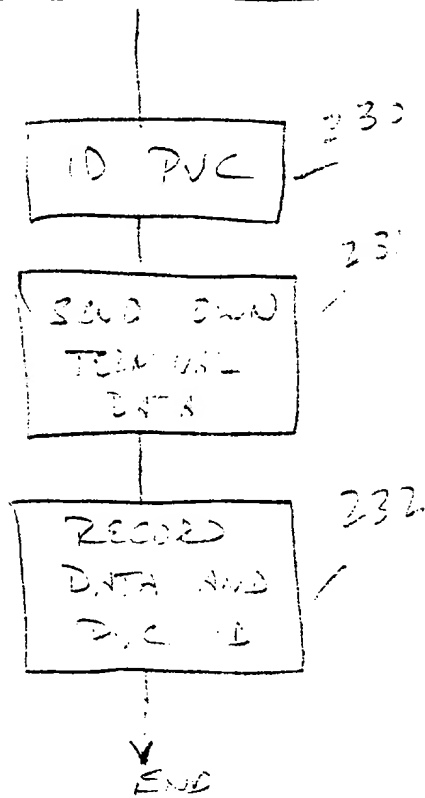


FIG 2B

CHANGE IN TERMINAL DATA

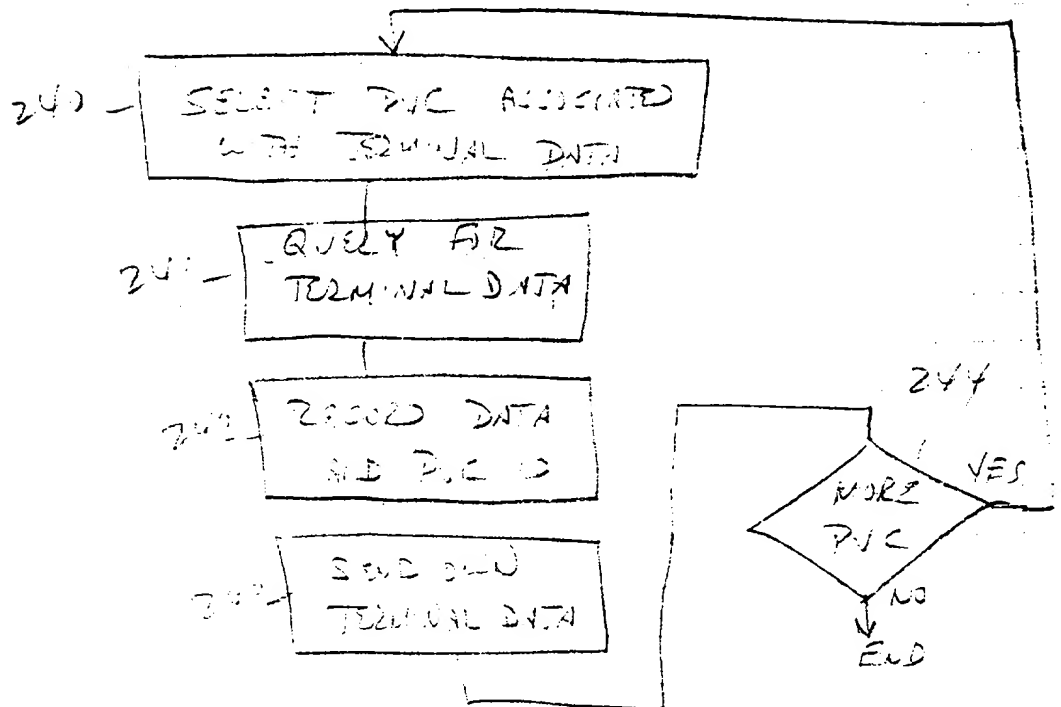


FIG 2C

FRAD 201

OWN
202
703 - XXX
:
YYY
301 - XXX
:
222

PVC A
NPA 1
NPA 2 - XXX
- 222
PVC B
NPA 3 - XXX
222
NPA 4

:

FG 3

2025-08-20 14:22:50

LOCATION

PVC

DESTINATION

301

A

302

30

E

303

302

C

301

302

V

303

303

E

301

303

A

302

F64

057540 6342260

09127489, 073438

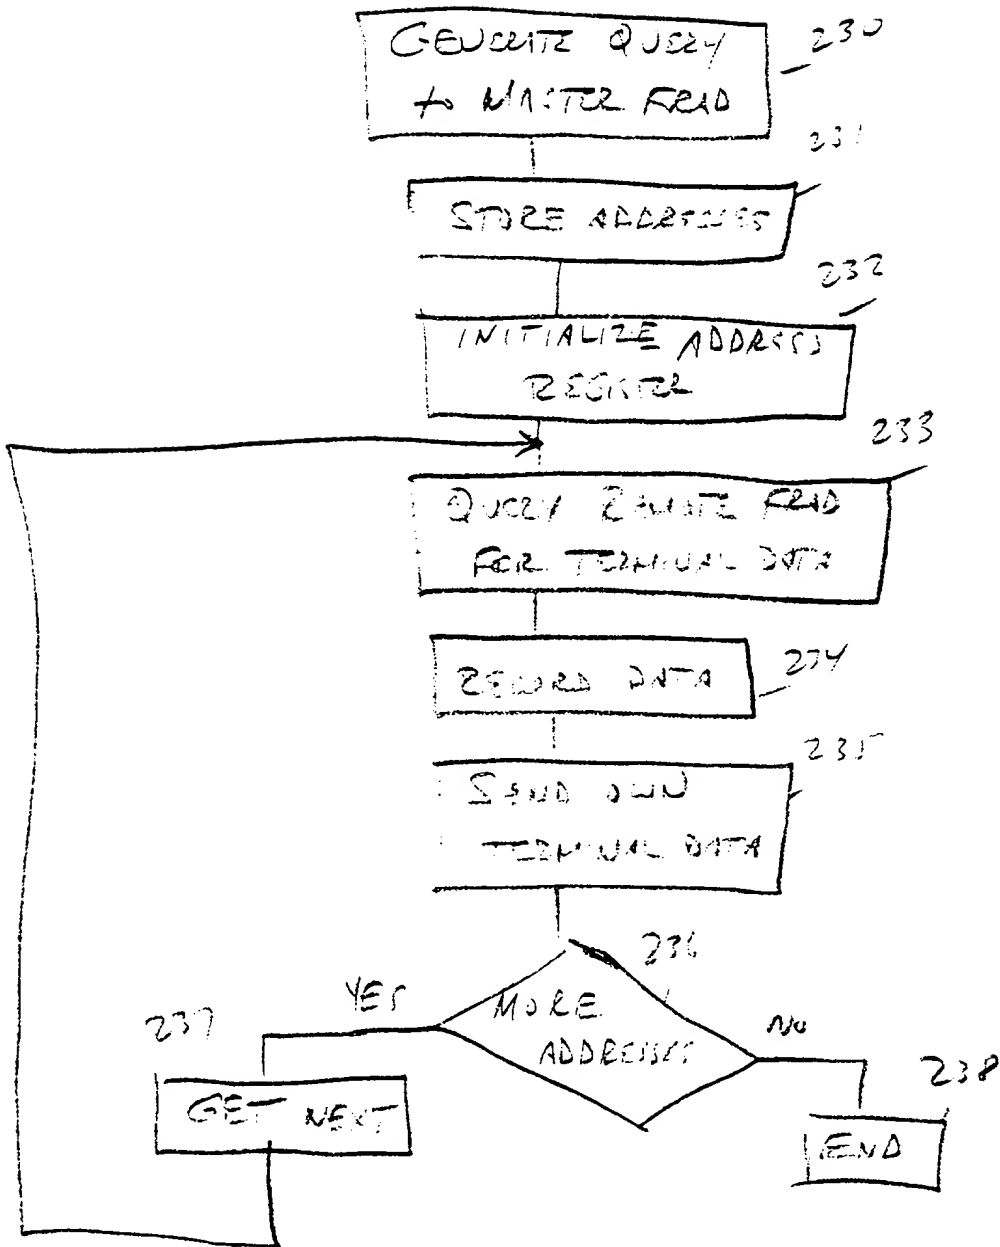


FIG 6A

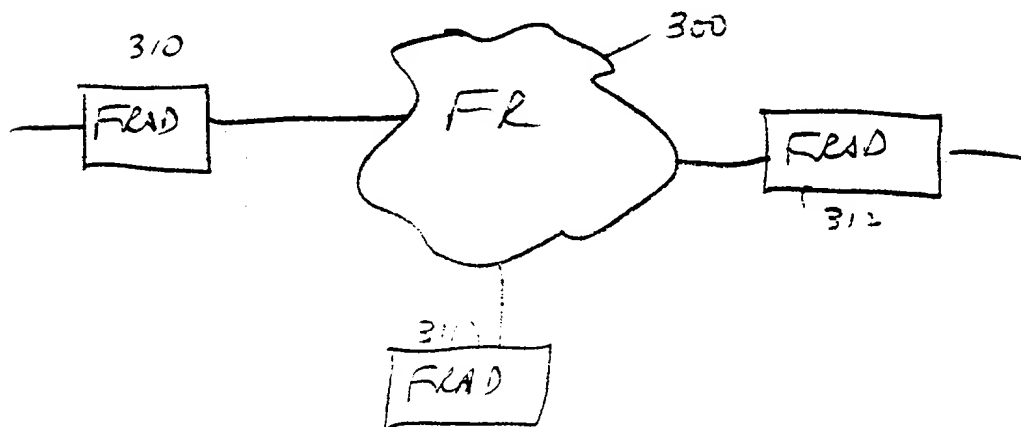


FIG 6B

00127493.073490
86720 ES42E60

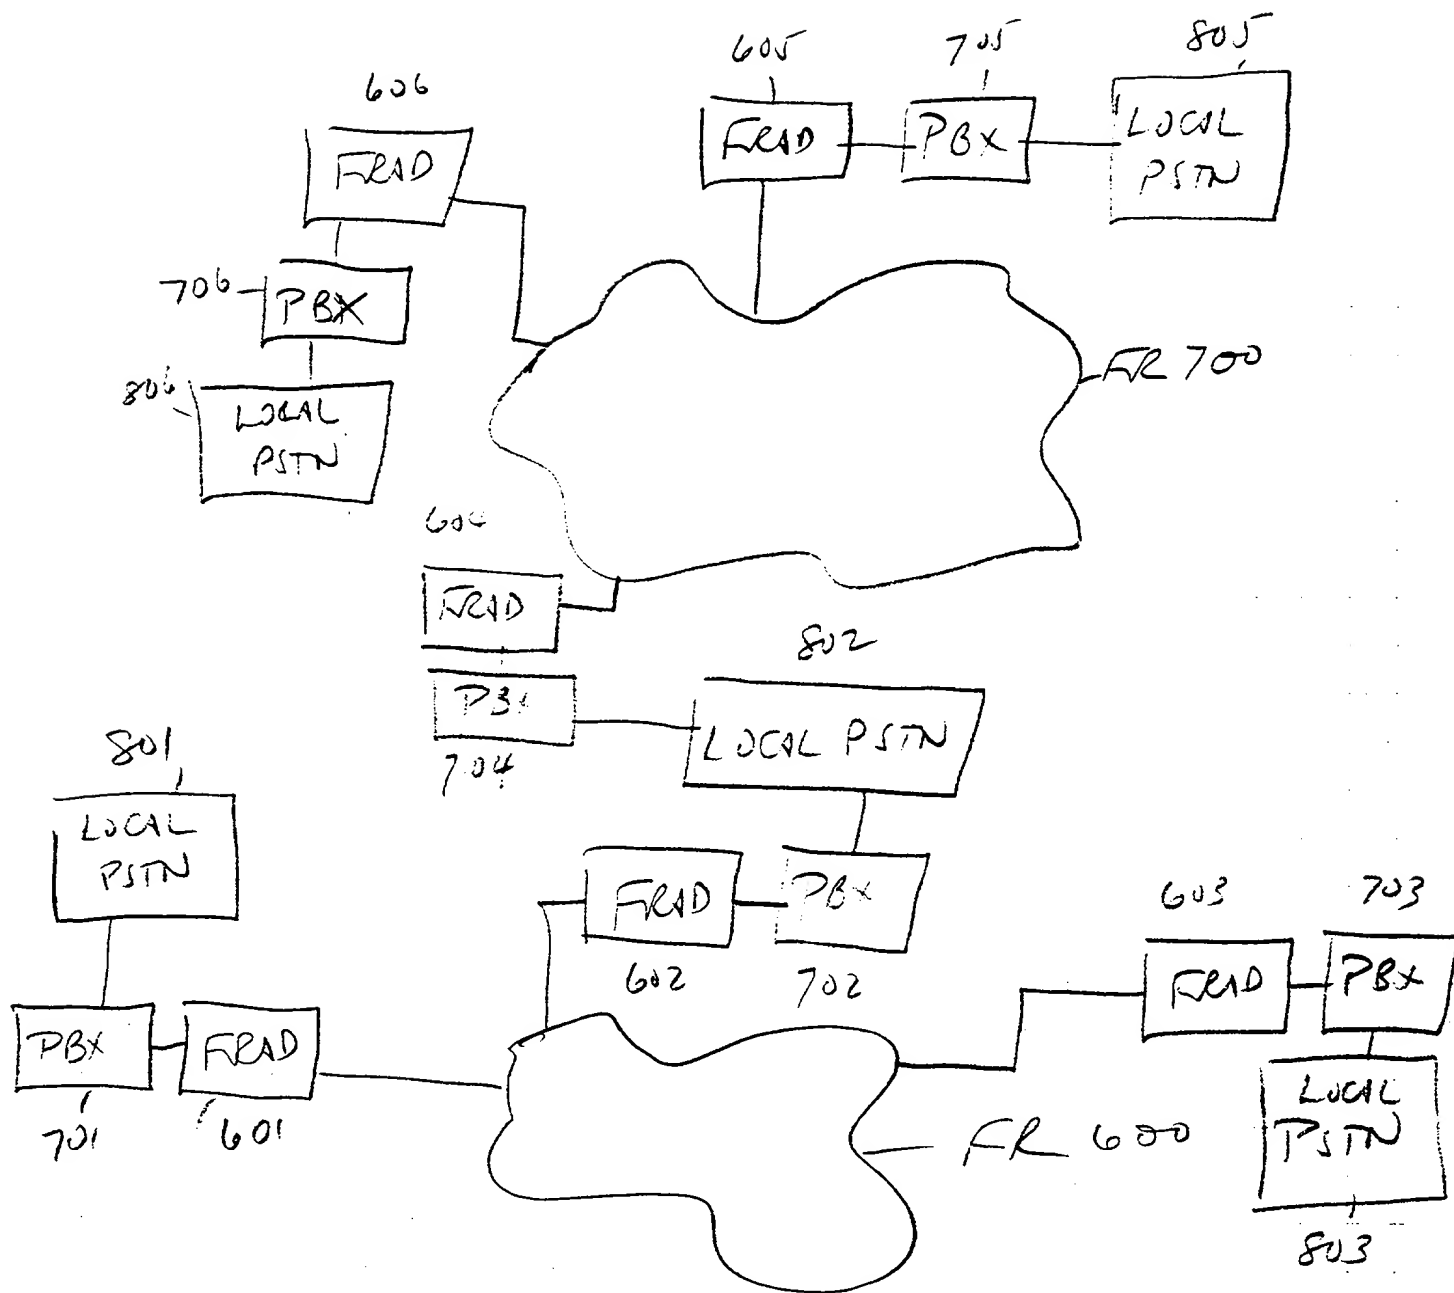


FIG 6

FRAD 604

OWN

202

703-xxx

yyy

301-AAA

BBB

DOMAIN MARK

NPA-801

NPA-803

FRAD 602

OWN

202

703-xxx

yyy

301-AAA

BBB

DOMAIN MARK

NPA-806

NPA-805

767

DECLARATION AND POWER OF ATTORNEY FOR UTILITY PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

*Method And Apparatus Using Enhanced Attachment For Improved Connectivity In
Telecommunications*

the specification of which

☒ is attached hereto.

☐ was filed on

as Application Serial No.
amended on

and was

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof of more than one year prior to this application, and said invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim the benefit under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below and also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)	(Country)	(Date Filed)	Yes	No
(Number)	(Country)	(Date Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing Date) (Status)

(Application Serial No.) (Filing Date) (Status)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Applicant No.) (Filing Date)

I hereby appoint Timothy D. Casey, Reg. No. 33,124; Michael Melton, Reg. No. 32,276; Deborah Miller, Reg. No. 37,679; Carl Evens, Reg. No. 33,874; and Ruben DeLeon, Reg. No. 37,812 my attorneys and Satheesh Karra, Reg. No. 40,246 my patent agent with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith and Elliott I. Pollock, Reg. No. 16,906; George Vande Sande, Reg. No. 17,276; Robert R. Priddy Reg. No. 20,169; Burton A. Amernick, Reg. No. 24,852; Richard Wiener, Reg. No. 18,741; Townsend M. Belser, Jr., Reg. No. 22,956; Morris Liss, Reg. No. 24,510; Martin Abramson, Reg. No. 25,787; George R. Pettit, Reg. No. 27,369; Louis Woo, Reg. No. 31,730; Elzbieta Chlopecka, Reg. No. 32,767; Eric J. Franklin, Reg. No. 37,134; Joseph P. Redmond, Jr., Reg. No. 18,753; and Joseph P. Curtin, Reg. No. 34,571 my attorneys of POLLOCK, VANDE SANDE, & PRIDDY, With offices located at 1990 M Street, N.W. Washington D.C. 20036-3425, telephone (202) 331-7111.

Send correspondence to:
Technology Department
MCI COMMUNICATIONS CORPORATION
1133 19TH STREET NW
WASHINGTON DC 20036

Direct Telephone Calls To:

(202) 331-7111

I hereby declare that all statements made herein of my knowledge are true and that all statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor:	Christopher L. Boyd		
P.O. /Residence Address:	2411 Nebulus Drive, Garland, Texas 75025 <u>75044 48</u>		
Citizenship: USA	Signature: <u>Christopher L. Boyd</u>	Date: <u>2-28-98</u>	

Full Name of Second Joint Inventor:	Hassen Pruitt		
P.O. /Residence Address:	2017 Houlton Lane, Plano, Texas 75025		
Citizenship: USA	Signature: _____	Date: _____	

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing Date) (Status)

(Application Serial No.) (Filing Date) (Status)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Applicant No.) (Filing Date)

I hereby appoint Timothy D. Casey, Reg. No. 33,124; Michael Melton, Reg. No. 32,276; Deborah Miller, Reg. No. 37,679; Carl Evens, Reg. No. 33,874; and Ruben DeLeon, Reg. No. 37,812 my attorneys and Satheesh Karra, Reg. No. 40,246 my patent agent with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith and Elliott I. Pollock, Reg. No. 16,906; George Vande Sande, Reg. No. 17,276; Robert R. Priddy Reg. No. 20,169; Burton A. Amernick, Reg. No. 24,852; Richard Wiener, Reg. No. 18,741; Townsend M. Belser, Jr., Reg. No. 22,956; Morris Liss, Reg. No. 24,510; Martin Abramson, Reg. No. 25,787; George R. Pettit; Reg. No. 27,369; Louis Woo, Reg. No. 31,730; Elzbieta Chlopecka, Reg. No. 32,767; Eric J. Franklin, Reg. No. 37,134; Joseph P. Redmond, Jr., Reg. No. 18,753; and Joseph P. Curtin, Reg. No. 34,571 my attorneys of POLLOCK, VANDE SANDE, & PRIDDY, With offices located at 1990 M Street, N.W. Washington D.C. 20036-3425, telephone (202) 331-7111.


Send correspondence to:
Technology Department
MCI COMMUNICATIONS CORPORATION
1133 19TH STREET NW
WASHINGTON DC 20036

Direct Telephone Calls To:

(202) 331-7111

I hereby declare that all statements made herein of my knowledge are true and that all statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor:	Christopher L. Boyd	
P.O. /Residence Address:	2411 Nebulus Drive, Garland, Texas 75025	
Citizenship: USA	Signature: _____	Date: _____

Full Name of Second Joint Inventor:	Hassen Pruitt	
P.O. /Residence Address:	2017 Houlton Lane, Plano, Texas 75025	
Citizenship: USA	Signature: 	Date: 7-28-95

Serial No.: Docket: RIC-97-118
Filing Date: 7/31/98 Attorney: Deborah Miller
Applicant(s): Chris Boyd et al

Title: Method And Apparatus Using Enhanced Attachment For
Improved Connectivity In Telecommunications

The following was mailed on the date indicated on the Certificate
of Mailing. The actual date of receipt in the U.S.P.T.O. is as of
the date stamped hereon:

Utility Patent: 24 pgs of specification (w/cover & abstract)
8 sheet(s) of 10 figures of informal drawings
Assignment of the invention to MCI Communications Corporation
PTO Form-1595
Declaration/Oath and Power of Attorney
Transmittal Letter
Certificate of Mailing/EM549006651US/Postcards
PLEASE DATE STAMP AND RETURN POSTCARD
[Date of Mailing: July 31, 1998]

MCI Ref # RIC 97 118

Date

7/31/98

Docketed

Expense List

Log Book

Amount

830.00

101 Filing Fee

102 Extra ind. claims

103 Extra claims

104 Multiple Dependent claims

105 Surcharge NTFMP

114 Provisional Filing Fee

115 Extension for response 1 month

116 Extension for response 2 months

117 Extension for response 3 months

118 extension for response 4 months

119 Notice of Appeal

123 Petition for Provisional Application

126 Submission of IDS

142 Utility Issue Fee

150 PCT transmittal

561 Printed copy of patent

566 Certif. or un copy of patent app.

581 Recordation of assignment, or other

588 APS TEXT Terminal session time

800 Basic fee

801 Basic supp.

899 Designation fee per country